


AF-FL009 INFINITY SEQUENCE WHITE

INFINITY SEQUENCE WHITE 3 functions complete of program station P600 for sequential control of water jets, light, times including electronic mixer to control temperature. Possibility to combine liquid or dry aromatherapy and music.


INFINITY SEQUENCE WHITE W42C124

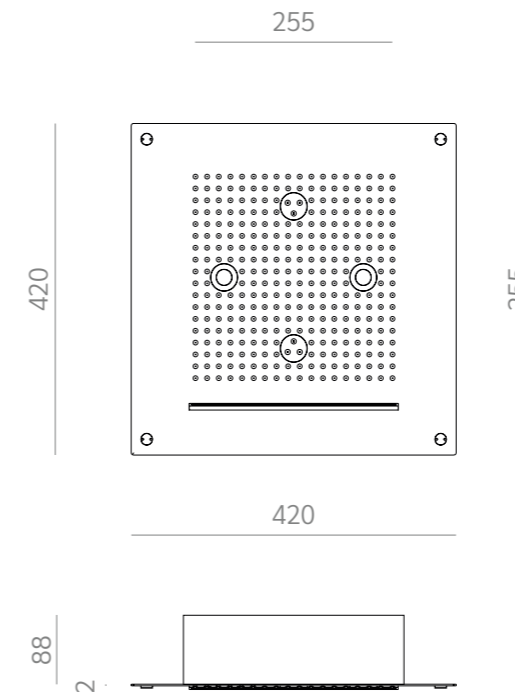

Description : Ceiling mounted built-in square showerhead 420 x 420 mm.
3 water-patterns : 1 rain jet, 2 nebulized jets 1 waterfall jet included 2 led spotlights with white light.
Materials : super mirror stainless steel plate, anti-limescale membrane in liquid silicone.
Ceiling recess depth : 100 mm
Water Supply : 1/2" inch
Operating pressure : 1,5 /5 bar
Recommended pressure : 3 bar
 Complete with fixing system.
N.B. To be teamed with systems to manage hydraulic and electric part



P600



SEQUENTIAL PROGRAM STATION PLUS FOR SHOWER PATH.

Electronic power station prepared to activate in sequence 8 steps with temporary control of water for each step. Light 1 channel RGB. Complete of Electronic mixer for control temperature. Equipped with keyboard with button to start program with transformer 12 V. Optional aromatherapy during the entire program.

N.B. To be teamed with a single wiring electrovalve C320 12V for each step.

C320



VALVES.

Solenoid valve for program station P600.


P02214






CABLES.

6-pole cable with M12 female quick lock connector L = 5 m to be teamed with shower system and program station

INSTALLATION INFINITY SEQUENCE WHITE

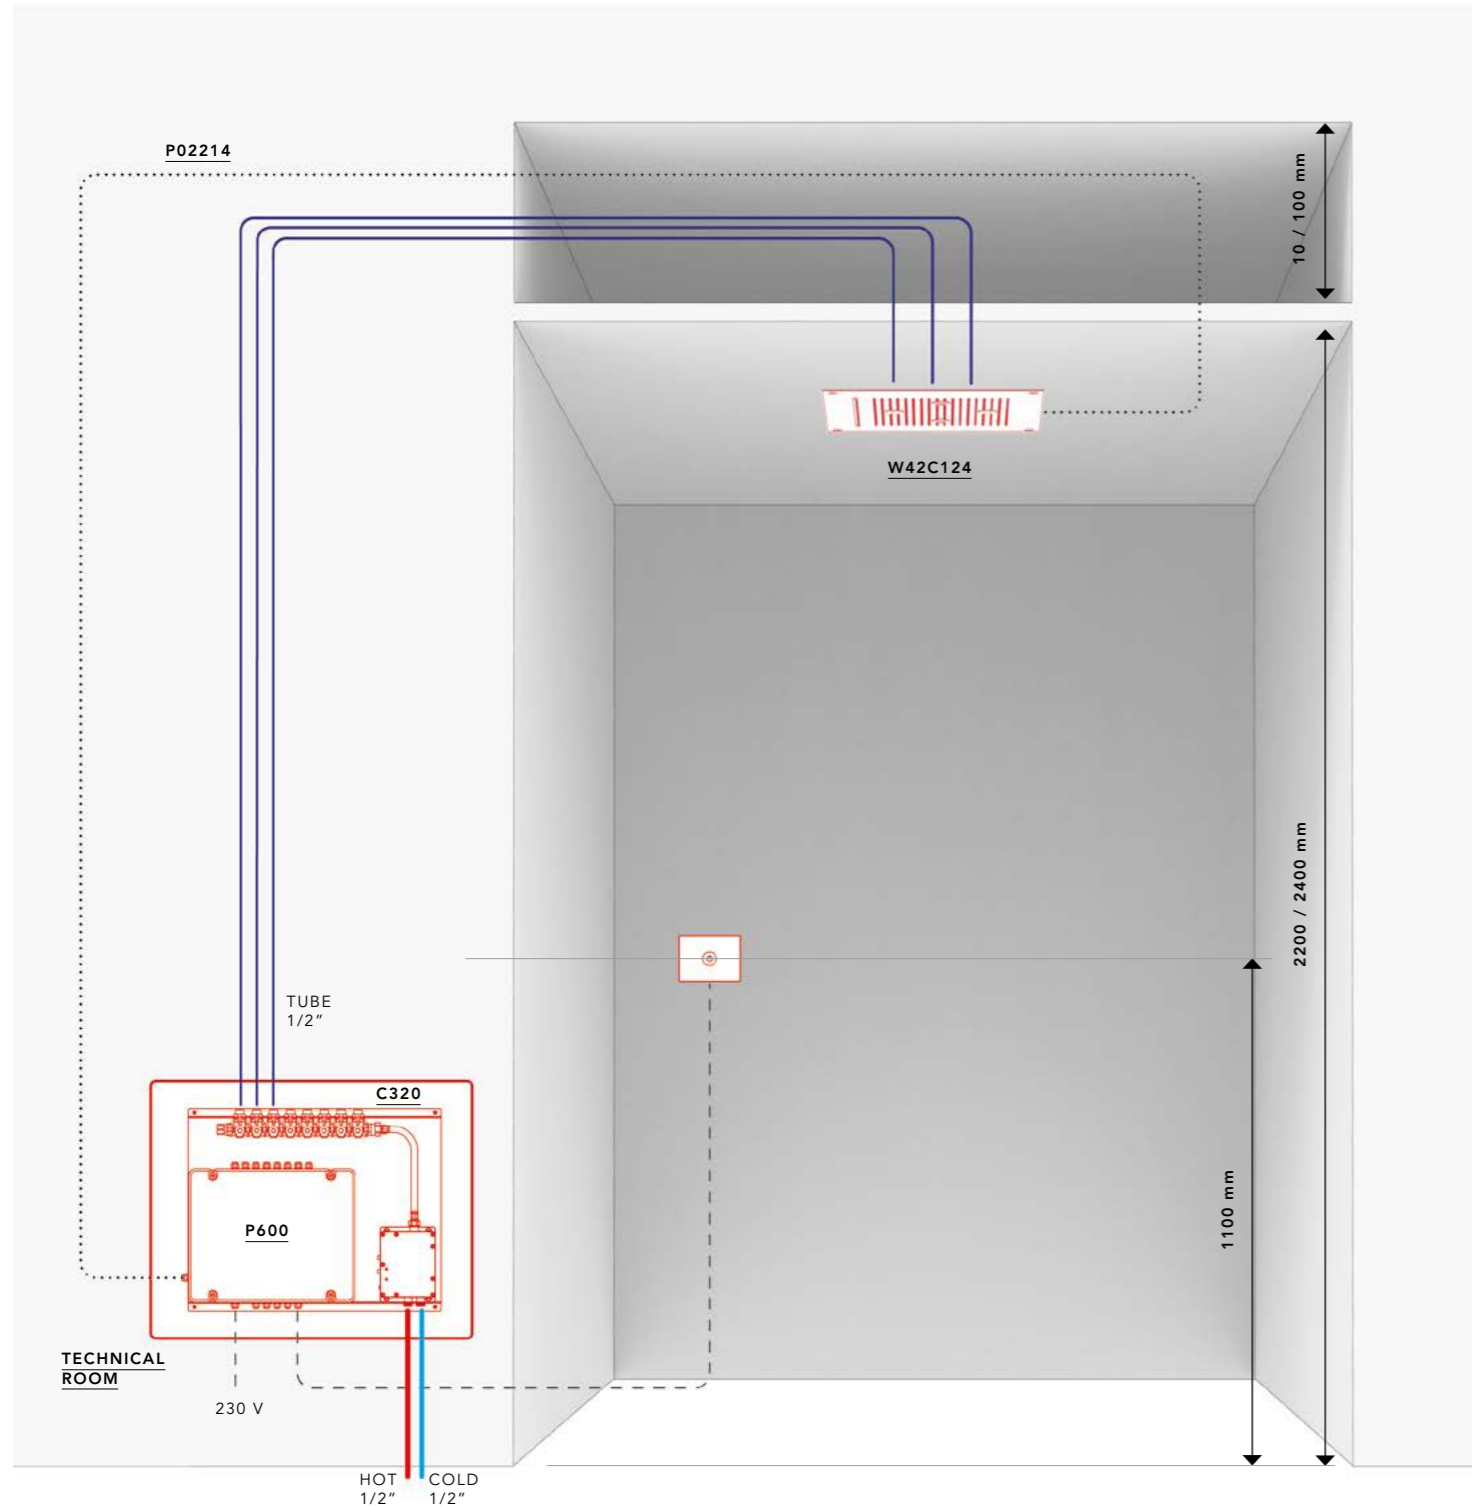

LEGEND

-  WATER SUPPLY 1/2"
-  ELECTRICAL CABLES
CORRUGATED PIPE DIAM. 20mm
-  LED CABLES DIAM. 20mm

TECHINICAL INFORMATION

WATER FLOW	min 15 l/m
WATER SUPPLY	1/2" inch
OPERATING PRESSURE	1,5/5 bar
RECOMMENDED PRESSURE	3 bar

CONFIGURATION

Code	Description	Jets	Quantity
W42C124	SHOWERHEAD	Rain, Waterfall and LED WHITE	1
P600	PROGRAM STATION	-	1
C320	VALVES	-	3
P02214	CABLES	-	1

OPTIONAL

OPTIONAL 01 - MUSIC

Code	Description	Quantity
PSOUND	mp3 device including amplifier with relative interface for sequential program station	1
KSOUND	Kit audio with 2 high output exit and connectors 2 poles . N.B. -To be teamed with keyboard touch (our cod. C57- C60) N.B. -To be teamed with PSOUND for use with aquaform program station.	1

OPTIONAL 02 - LIQUID AROMA

Code	Description	Quantity
RELP350	RELE' modules for 2 liquid essence kit.	1
PE427	Liquid essences kit. Dosing pump complete of: - Injector connector with tube kit - Neck off tank - Tank wall bracket	1
EL1/EL2/EL3/EL4	5 lt mint essence tank	1

OPTIONAL 03 - DRY AROMA

Code	Description	Quantity
A40	Recessed diffuser for aromatherapy system for diffusion and relative control flush-mounted 4 module box (type 504) kit packaging 3 flower-relax-energy essences supplied. Suitable for humid environments.	1
E1/E2/E3/E4/E5	AROMATHERAPY ESSENCE 3 cartridges set.	1